








### i-4.5 Features

- 4.5" polypropylene LF driver with rubber surround
- 1", ferrofluid, neodymium, silk-dome tweeter
- 70° x 70° coverage
- 100 Hz – 20 kHz frequency response
- Max long term output 109 dB SPL
- High-density wood enclosure with durable textured finish
- Variable position yoke bracket mounting hardware included
- Ideal as satellites with i-Class subwoofers

### i-4.5 Applications


- Restaurants
- Bars and clubs
- Cafes
- Themed entertainment venues
- Houses of worship
- Shopping malls
- Airports
- Delay and under-balcony coverage

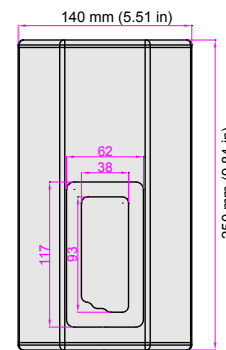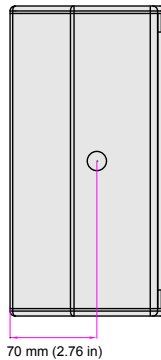











i-Class systems are designed for AV contractors seeking a high-performance alternative to plastic box loudspeakers. By combining professional-grade components and rugged wood enclosures, i-Class models deliver sonic performance far beyond their competition.

The i-4 is a compact, two-way loudspeaker designed specifically for near-field applications where quality sound reproduction and value are paramount. Professional-grade drivers include a single, 4.5-inch woofer

and 1-inch, silk-dome, ferrofluid tweeter. Both drivers are mated to a high-quality crossover network and housed in a robust, high density wood enclosure finished with a rugged, industrial-grade coating. An angled design ensures easy installation in corners or on flat surfaces using the included mounting hardware. Connections are quick and easy thanks to recessed, phoenix input terminals. i-4s are also ideal as satellites with any of the i-Class subwoofers.












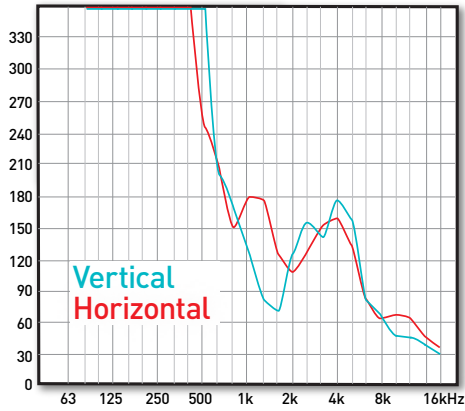


### i-4.5 Impedance (Ohms)

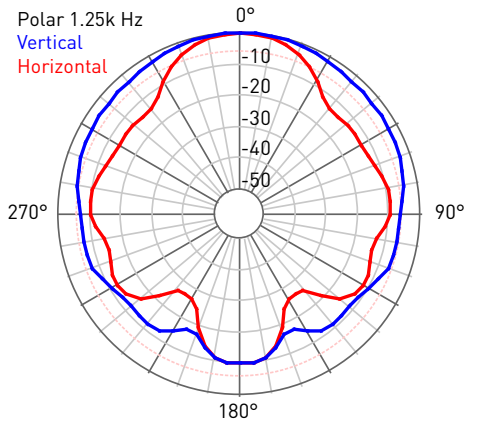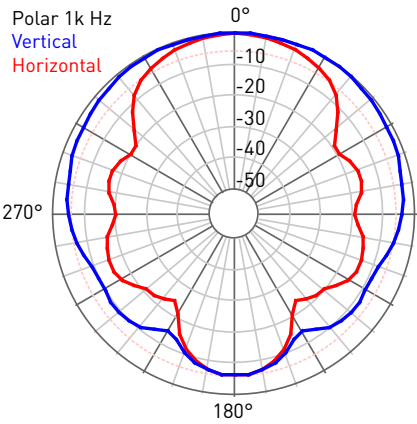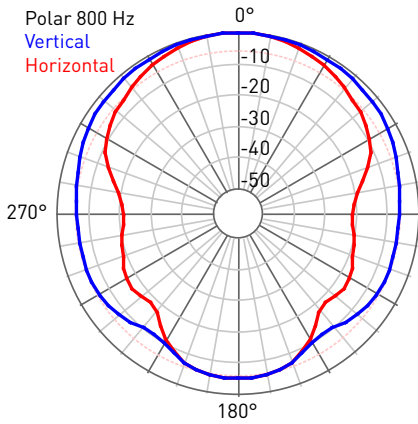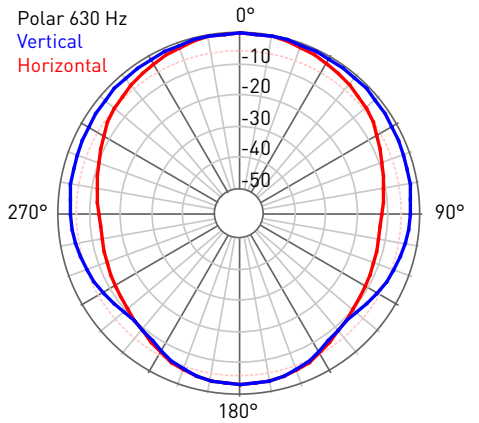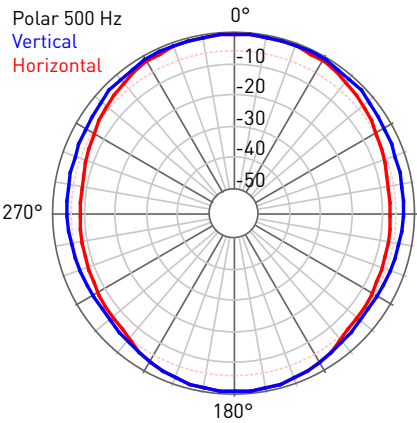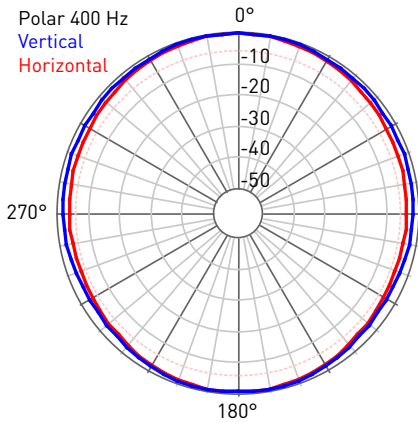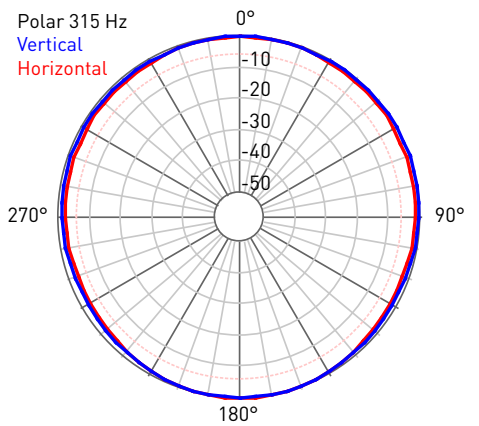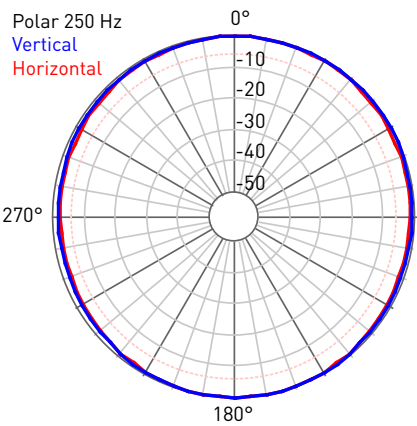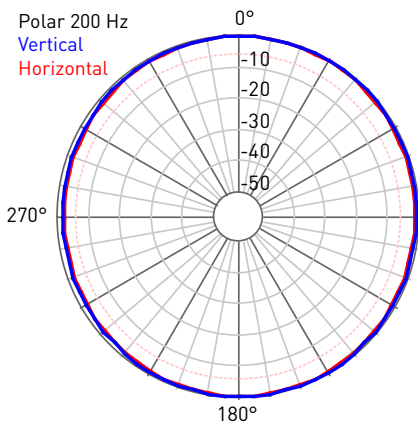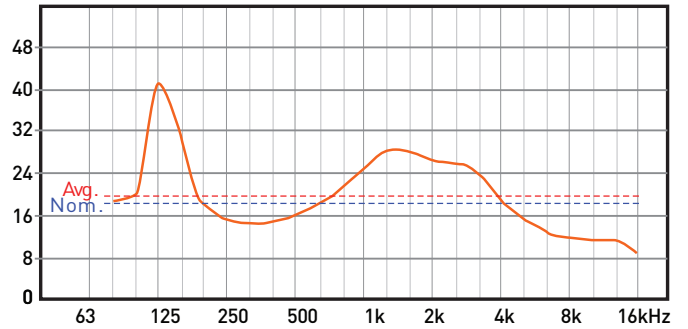

# i-4.5

## Two-Way Surface-Mount Foreground System

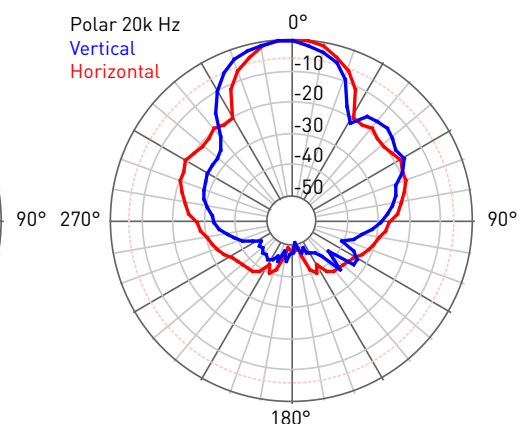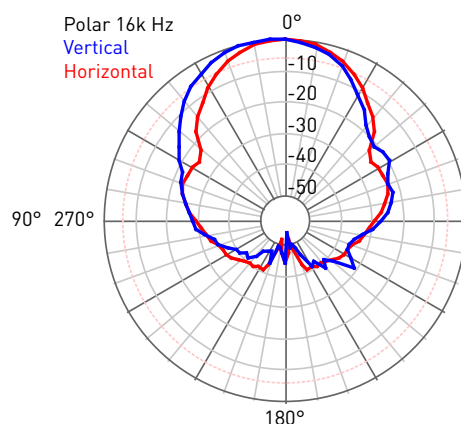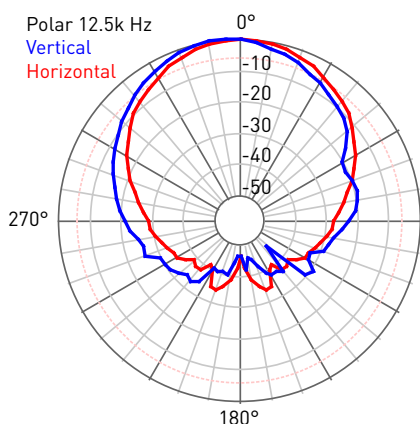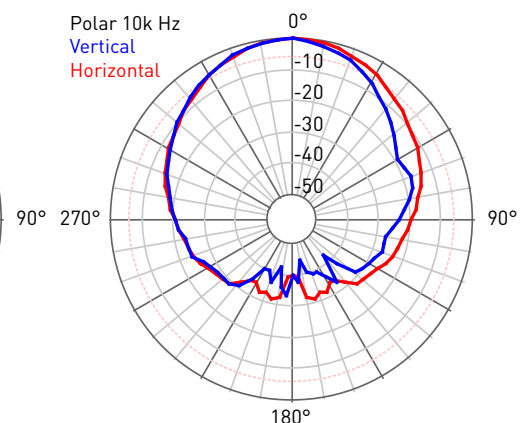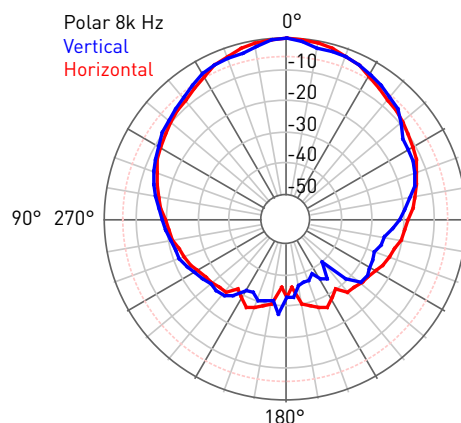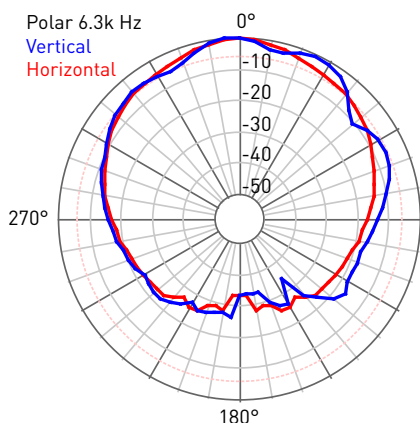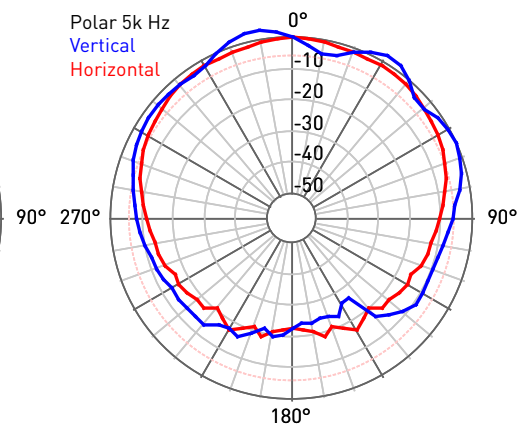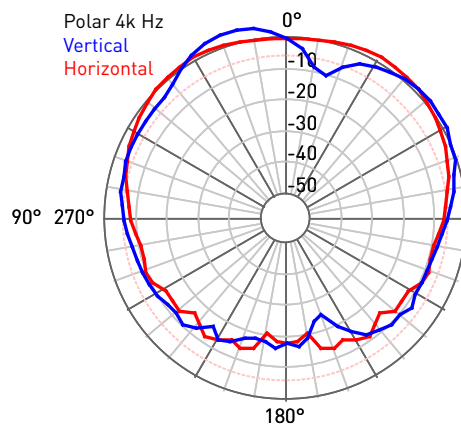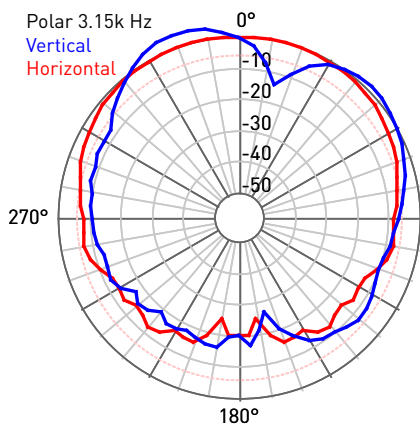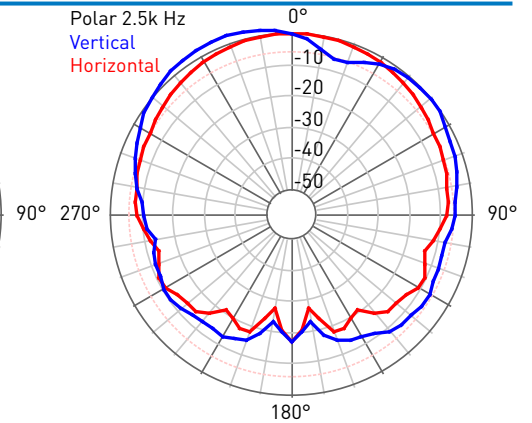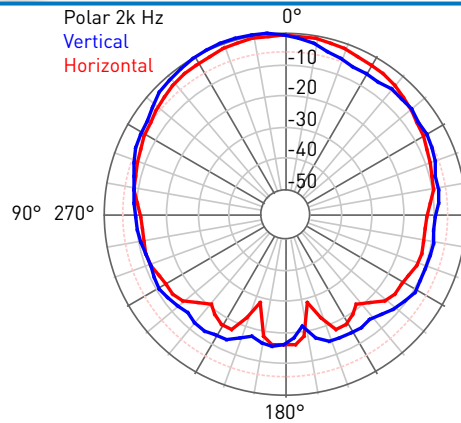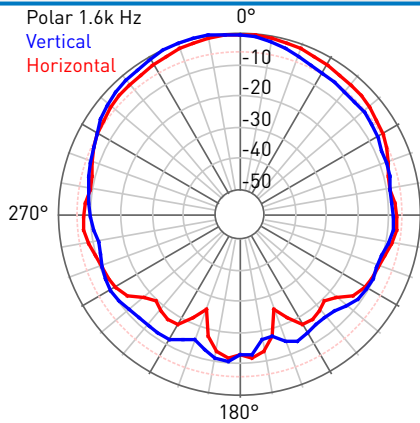

<b>Model</b>	<b>i-4.5</b>	
	<b>Description</b>	Compact 4.5" surface-mount 2-way system
<b>Acoustic Data</b>		
	<b>Frequency Response (+-3 dB)</b>	100 Hz - 20 kHz
	<b>Frequency Range (-10 dB)</b>	80 Hz - 20 kHz
	<b>Sensitivity (1 W/1 m)</b>	85 dB
	<b>Power Handling Long Term</b>	60 watts
	<b>Power Handling Program</b>	120 watts
	<b>Max Peak SPL</b> (band limited pink noise 6 dB crest factor)	109 dB SPL
	<b>Max SPL Long Term</b> (AVG SPL @1 band limited pink noise 6 dB crest factor)	103 dB SPL
	<b>Coverage Horizontal</b>	70 degrees - 6 dB
	<b>Coverage Vertical</b>	70 degrees - 6 dB
<b>Transducer Data</b>		
	<b>LF Driver Description</b>	4", polypropylene cone, rubber surround, 1" (25 mm) voice coil, ferrite, 10 mm winding, 5mm gap height, 16 Ohms
	<b>HF Driver Description</b>	1" silk dome, 8 Ohms, neodym, ferrofluid, waveguide
	<b>Impedance</b>	16 Ohms
	<b>Connectors</b>	Phoenix type connector
	<b>Cabinet Materia</b>	High density wood composite
	<b>Cabinet Surface</b>	Black polyurethane coating
	<b>Dimensions (H x W x D)</b>	9.84 x 5.51 x 4.92 in 250 x 140 x 125 mm
	<b>Weight</b>	Net (single): 7 lbs / 3.18 kg Shipping (single): 8 lbs / 3.63 kg Shipping (carton of four): 56 lbs / 25.4 kg

**i-4.5 without grill**



**i-4.5 mounting bracket**

